S6

S6 TRIDEM

- Capacidad y Estabilidad
  Capacity and Stability
- Manejo y Transitabilidad
  Handling and Trafficability
- Mantenimiento y Costos
  Maintenance and Costs
- Seguridad y Medio Ambiente
  Safety and Environment
- Eficiencia y Rendimiento
  Efficiency and Performance

Cestari

Gran capacidad de carga, estabilidad y adherencia en terrenos difíciles

High load capacity, stability and grip on difficult ground.

El eje tridem es un sistema de rodadura de 3 ejes equipado con 6 ruedas, que proporciona una mayor capacidad de carga, estabilidad y tracción en terrenos difíciles. Esto se traduce en una mayor eficiencia en el transporte de granos, reduciendo los tiempos de carga y descarga, y minimizando el riesgo de accidentes.

The tridem axle is a 3-axle rolling system equipped with 6 wheels, providing greater load capacity, stability and traction on difficult terrain. This translates into greater efficiency in grain transport, reducing loading and unloading times, and minimising the risk of accidents.

S6 43.000L EJE TRIDEM



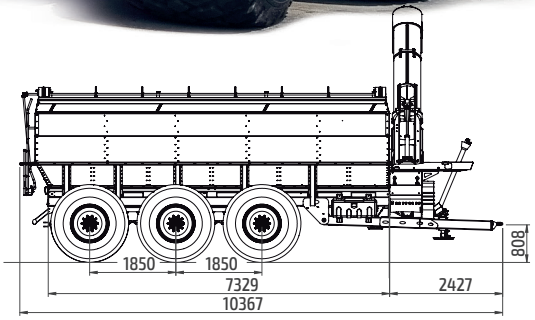

NEUM. 750/60 - 30.5

S6 43000L TRIDEM

Capacidad sin rebase superior.	Capacity -Not exceed the upper edge-	43.000 L
Tubo de descarga (ø)	Unloading tube (ø)	580 mm
Tiempo de descarga (*1)	Unloading time (*1)	4.00 min
Peso tara sin orugas	Weight tare without track system	6.300 Kg
Peso tara con orugas (Modelo ST)	Weight tare with track system (ST Model)	9.920 Kg
Potencia de tractor requerida	Tractor power required	200 HP
Sinfín de piso (ø)	Floor auger (ø)	470 mm
Sinfín de tubo (ø)	Tube auger (ø)	554 mm

(*1) Cereal seco a 540 rpm. / (*1) Dry cereal at 540 rpm.

3 ejes con ballestas (dos ejes directrices autodireccionales), 6 neumáticos y frenos en cada una de las ruedas. Usos convenientes: en acoplados de 35 a 50 toneladas de carga, para cosecha en todo tipo de terrenos y para acarreo y transporte de cereales por caminos consolidados.

3 axles with leaf springs (Two self-steering axles), 6 tires and brakes on each wheel.
Suitable uses: in trailers with a load capacity of 35 to 50 tons, for harvesting in all types of terrain and for hauling and transporting cereals on consolidated roads.

EQUIPAMIENTO EQUIPMENT

1. Tolva totalmente abulonada.
2. Cobertor de unión de tubo de descarga.
3. Sombrero doble de piso.
4. Guía pasamangueras giratorio.
Lubricación externa centralizada.
5. Puerta trasera para acceso al interior (de la unidad)
6. Sistema de limpieza con mayor área de apertura.
7. Tapa desmontable trasera de sinfines de piso para limpieza.
8. Visor de cereal. (delantero y triple: mejor visualización).
9. Reflector led en tubo de descarga.

Cajón de herramientas. / Enganche delantero con rótula. / Escaleras traseras rebatibles. / Gato de elevación. / Indicador de apertura de compuertas de piso. / Organizador de mangueras. / Portafaros rebatibles. / Sistema de descarga de cereal por gravedad más ágil. / Sistema de lona enrollable. / Sistema hidráulico triple: movimiento de tubo, compuertas de piso y fondo deslizante (limpieza y descarga por gravedad). Tubo de descarga con mayor plegado / Cilindro hidráulico de tubo con sistema de reducción de velocidad. / Tubo inferior desmontable.

Sistema de freno neumático/hidráulico
Sist. hidráulico p/ alineación de ruedas (p/marcha atrás)
Sist. de dirección autodireccional.

1. Completely bolted grain cart.
2. Joining cover of Unloading tube.
3. Double Floor cover.
4. Rotary guide for hoses.
Centralized lubrication.
5. Rear door for access to the interior (of the unit)
6. Cleaning system with a greater opening area.
7. Removable rear cover of floor augers for a better cleaning.
8. Cereal viewer (front and triple for a better visualization)
9. Unloading tube led spotlight.

Plastic toolbox. / Front hitch with kneecap. / Standard Ladders: rear hinged. / Lifting Jack / Floor hatches opening indicator. / Centralised lubrication system. / Hose organizer. / Hinged rear lights. / Smoother gravity unloading system. / Roll top canvas system. / Hydraulic System (triple): tube, floor hatches and bottom sliding floor movement. / Unloading tube with better folding. / Tube hydraulic cylinder with speed reduction system / Removable lower unloading tube (extension casing).

Braking System (Pneumatic/Hydraulic)
Hydraulic System for Wheel Alignment (for reverse driving)
Self-Steering Directional System

www.imcestari.com

Cestari

CestariTolvas

INDUSTRIAS METALÚRGICAS CESTARI S.R.L.

+54 2473 430490 / informes@imcestari.com / Colón Buenos Aires, Argentina

+54 9 2473 519031